28221
B&P 1

2239

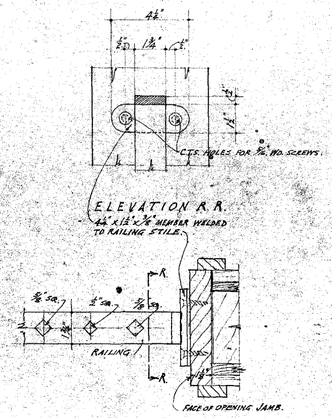

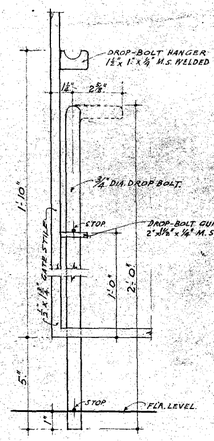

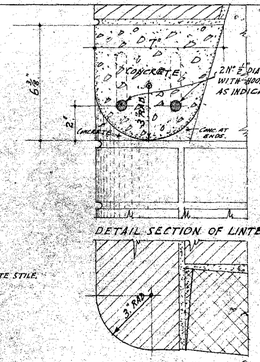







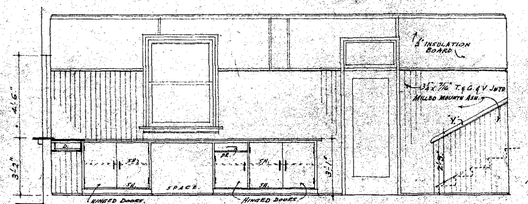









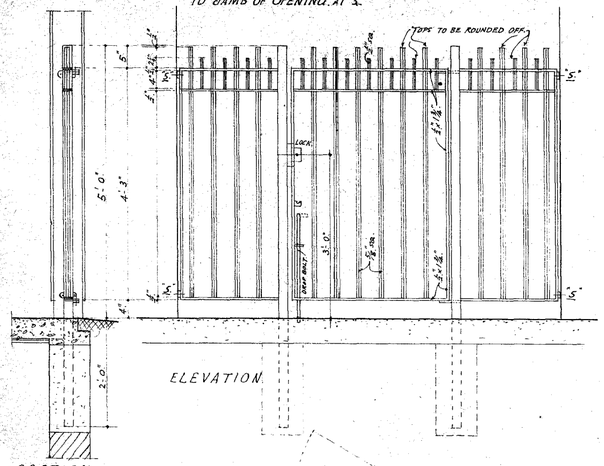







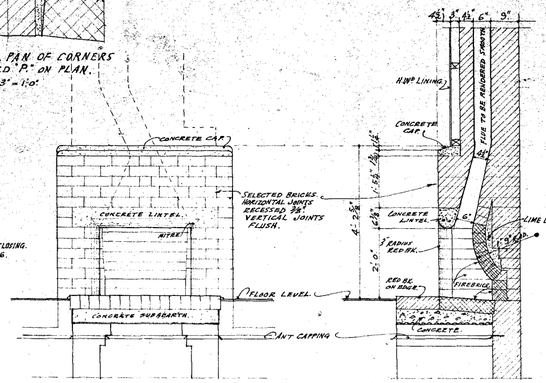



NOTE.
ALL FIREBRICKS SHALL BE LAID IN REFRACTITE MORTAR – 95 lbs REQUIRED.
THE CURVED BACK SHALL BE OF WEDGE TYPE FIREBRICKS, TYPE M°39, 9"x 4½" x 3" to 2½".
ITEM M°. 9/B IN STORES SCHEDULE. 33 M°. REQUIRED.
STRAIGHT FIREBRICKS SHALL BE TYPE M°16, 9"x 4½" x 3". ITEM M°. 7/B IN STORES SCHEDULE 60 M°. REQUIRED.







NOTE:– CONCRETE FOR LOBBY FLOOR SHALL BE AS FOLLOWS:– 1 PART OF PORTLAND CEMENT, 2 PARTS OF CLEAN COARSE SAND, 4 PARTS OF ¾" CRUSHED BLUESTONE & ½ PART OF HYDRATED LIME. THE FLOOR SHALL BE LAID TO WITHIN ⅜" OF FINISHED FLOOR LEVEL AND WHILE STILL GREEN A ½" WEARING SURFACE SHALL BE LAID COMPOSED OF 2 PARTS OF FINE DUSTLESS BLUESTONE TOPPINGS TO 1 PART OF PORTLAND CEMENT.

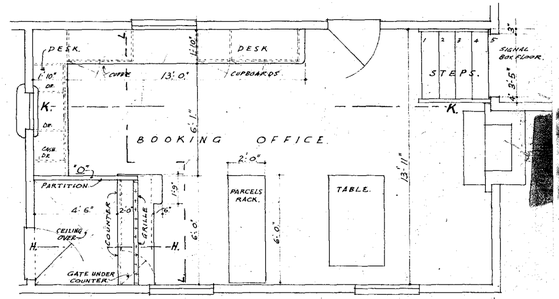

SHEET N°2.

V. R.

ELPHINSTONE.

PROPOSED COMBINED BOOKING OFFICE AND SIGNAL BO.

VARIOUS DETAILS.

SCALES AS SHOWN.

Chief Civil Engineer.

CHIEF ARCHITECT'S OFFICE COPY

Work Completed.				
Drawn by	Checked by	Correx N°	Chief Architect. 7. 6. 1940.	S.B 2239. A. 23.	PLAN N° 297-40
		11/9/38.		